


KELLY

Kelly

Kelly is used to connect the topmost joint of drill pipe for drill stem turning when the rotary table runs.

Jereh supplies both square kelly and hexagonal kelly.

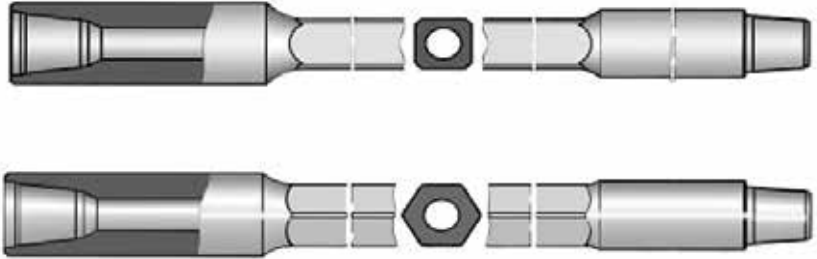

Technical Specification of Kelly

Kelly Size		Length Mm	Upper box connection				Lower pin connection		ID	Driving section		
mm	in		Type(LH)		O.D.		thread	OD		Cross flat	For square	Cross corner for hex
			Std	optional	Std	optional						
63.5	2 ¹ / ₂	12.19	6-5/8REG	4 ¹ / ₂ REG	196.8	146		85.7	31.8	63.5	83.3	
76.2	3	12.19	6-5/8REG	4 ¹ / ₂ REG	196.8	146	NC26	104.8	44.4	76.2	100	85.7
88.9	3 ¹ / ₂	12.19	6-5/8REG	4 ¹ / ₂ REG	196.8	146	NC31	120.6	57.2	88.9	115.1	100.8
108	4 ¹ / ₄	12.9	6-5/8REG	4 ¹ / ₂ REG	196.8	146	NC38	158.8	71.4	108	141.3	122.2
							NC38	161.9	71.4	108	141.3	122.2
133.4	5 ¹ / ₄	12.9	6-5/8REG	4 ¹ / ₂ REG	196.8	146	NC46	177.8	82.6	133.3	175.4	151.6
							NC50	177.8	82.6	133.3	175.4	151.6
152.4	6	12.9	6-5/8REG		196.8	146	5 ¹ / ₂ FH			152.4		173
							NC56			152.4		173

Index-2016.10-V1/EN

Copyright © Jereh Global All rights reserved.



Jereh Global Development LLC

Add: No.9 Jereh Road, Laishan District, Yantai, P. R. China

Tel: 0535-6765628 6765630

Fax: 0535-6723171 6723172

Email: petroleum@jereh.com

Http: www.jereh.com