

POLISHED SUCKER ROD BOP

Polished Sucker Rod BOP


Polished sucker rod BOP is designed for sealing of sucker rod pump polished rod, wellhead sealing while stuffing box replacing, and for other repair work. Especially for well flooding or other natural disasters, sucker rod BOP can act for continuous well shutdown to avoid environmental pollution.

Main pressure of our sucker rod BOP is 1,500 or 2,000 psi.



Polished Sucker Rod BOP

Polished Sucker Rod BOP Beakdown Drawing

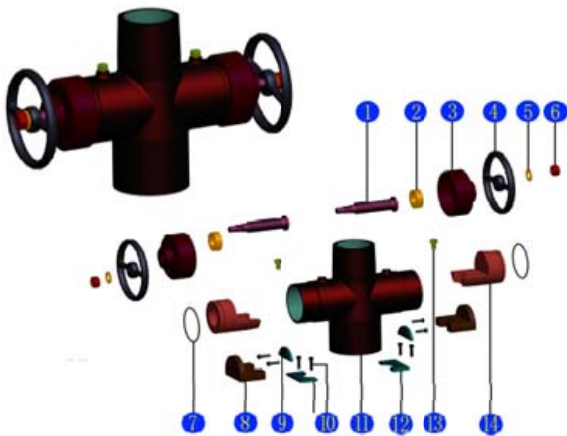

NO.	Name	Material	Qty.
1	STEM	410	2
2	STEM RING	5140	2
3	BONNET	1045	2
4	HANDLE	WCB	2
5	GASKET	Cu	2
6	HEX. NUT	1045	2
7	O-RING	NBR	2
8	RAM CORE	I-4	2
9	RETAINER PLATE	410	2
10	HEX. STUD	1045	8
11	BODY	WCB	1
12	RETAINER PLATE	410	2
13	HEX. STUD	1045	2
14	RAM	4130	2

Address:	No.7, Aucma Street, Laishan District, Yantai, Shandong, P.R.China 264003
Tel:	+86-535-6723520 6723201
Fax:	+86-535-6723171 6723272
E-mail:	petroleum@jereh.com; cnjereh@gmail.com
Website:	Http://www.jereh-oilfield.com