


WELLHEAD

Wellhead

Jereh supplies high quality wellhead products, such as, christmas trees, casing head, tubing head, and other auxiliary equipments suitable for land and offshore applications to explore, develop and produce oil.

Our wellhead and christmas tree Designing, manufacturing, testing and control are all in accordance with API 6A, can be used to replace FMC wellhead products.

The wellheads are available in pressure rating up to 15,000PSI, load rating up to 500 tons, material classes from AA through FF, temperature classes from L through V, product specification levels from 1 through 4 and PR1 & 2, and also meet NACE Standard MR0175.

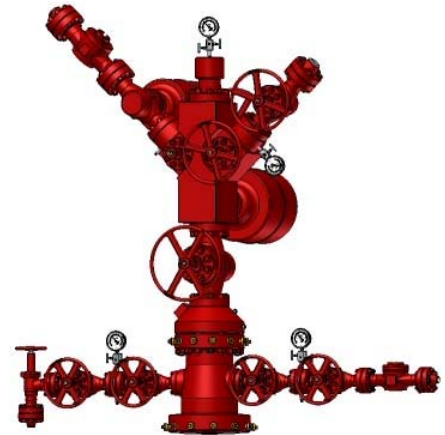

Wellhead assembly

Technical Specifications of Wellhead Assembly

| Wellhead Assembly Parameter | | Wellhead Assembly Type | | | | | | |
|-----------------------------|-----------|------------------------|----------------|-------------------|----------------|-------------------|-----------------|--------------------|
| | | JD-WS 65/21 | JD-WS 65/35 | JD-WS 80-65/35 | JD-WS 65/70 | JD-WS 78-65/70 | JD-WS 65/105 | JD-WS 78-65/105 |
| Rated Pressure (psi) | | 3,000 | 5,000 | 5,000 | 10,000 | 10,000 | 15,000 | 15,000 |
| Nominal Size | Main (in) | 2-9/16 | 2-9/16 | 3-1/8 | 2-9/16 | 3-1/16 | 2-9/16 | 3-1/16 |
| | Side (in) | 2-9/16 | 2-9/16 | 2-9/16 | 2-9/16 | 2-9/16 | 2-9/16 | 2-9/16 |
| Working Temperature | | P U | | | | | | |
| Available Medium | | Crude Gas | | | | | | |
| PSL | | PSL1~3 | | | | | | |
| Material Class | | AA~FF | | | | | | |
| PR | | PR1~2 | | | | | | |
| Connection Type | | Clamp, Flanged | | | | Flanged | | |

Christmas Tree



Christmas Tree

Christmas Tree Components:




Flanged Cross



Double Studded Adapter



Tubing Head Adapter



Studded Cross

Technical Specifications of Christmas Tree

| Christmas Tree Parameter | Christmas Tree Type | |
|--------------------------|---------------------|--------------------|
| | JD-CT65/25 | JD-CT 65/60 |
| Rated Pressure (psi) | 3,500 | 8,500 |
| Nominal Size (in) | 2-9/16 | 2-9/16 |
| Working Temperature | P U | P U |
| Available Medium | Crude, Water | Crude, Water |
| Connection Type | Flanged Connection | Flanged Connection |
| Material Class | AA~DD | AA~FF |
| PSL | PSL1~2 | PSL1~3 |
| PR | PR1~2 | PR1~2 |

Casing Head



Casing Head

Technical Specifications of Casing Head

| Casing Head Parameter | Casing Head Type | | |
|-----------------------|---------------------|--------------------------------------------|------------------------------|
| | JD-BW 5-1/2~20 | JD-BS 5-1/2~30 | JD-BT 5-1/2~20 |
| Connection type | Bottom Welded Type | Bottom Slip Type and Double seal Structure | Bottom threads connection |
| Casing Size (in) | 5-1/2, 7, 9-5/8, 20 | 5-1/2, 7, 9-5/8, 12-1/4, 13-3/8, 20, 30 | 5-1/2, 7, 9-5/8", 13-3/8, 20 |

Tubing Head



Tubing Head

Technical Specifications of Tubing Head

| | |
|------------------|------------------------|
| Tubing Head | JD-TH7-1/16~13-5/8 |
| Nominal Dia.(in) | 7-1/16 ~ 13-5/8 |
| Working | 2,000~20,000PSI |
| Temperature | - 60°C ~ +121°C (K,U) |
| Range | PSL1~4, PR1~2, AA ~ FF |

| | |
|----------|--------------------------------------------------------------------------|
| Address: | No.7, Aucma Street, Laishan District, Yantai, Shandong, P.R.China 264003 |
| Tel: | +86-535-6723520 6723201 |
| Fax: | +86-535-6723171 6723272 |
| E-mail: | petroleum@jereh.com; cnjereh@gmail.com |
| Website: | Http://www.jereh-oilfield.com |