


## CEMENTING HEAD

### Cementing Head

Cementing Head is a special tool for pumping slurry and releasing plug, and cementing Head is used as wellhead unit in all kinds of cementing operation. The types of Cementing Head are various as Single-plugs, Double-plugs, Multi-Plugs, drill pipe cementing head and so on.


### Single-plug Cementing Head

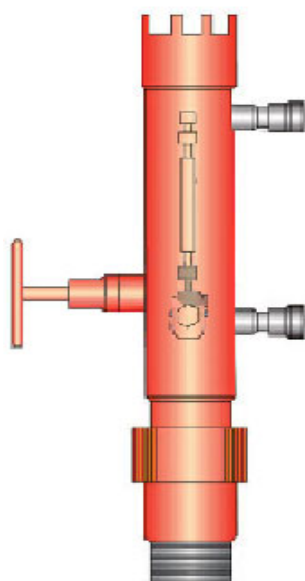

Technical Specification of Single Plug Cementing Head

|                               |          |        |       |       |       |       |
|-------------------------------|----------|--------|-------|-------|-------|-------|
| Specification (in)            | 13-3/8   | 10-3/4 | 9-5/8 | 7-5/8 | 7     | 5-1/2 |
| Overall Length (mm)           | 1,959    | 1,973  | 1,895 | 1,605 | 1,605 | 1,523 |
| Rated Pressure (MPa)          | 35       | 50     |       |       |       |       |
| Manifold Connection           | 2" Union |        |       |       |       |       |
| I.D. of Plug Container (mm)   | 320      | 250    | 225   | 176   | 160   | 125   |
| Length of Plug Container (mm) | 685      | 625    | 550   | 480   | 480   | 430   |


## Double-plug Cementing Head

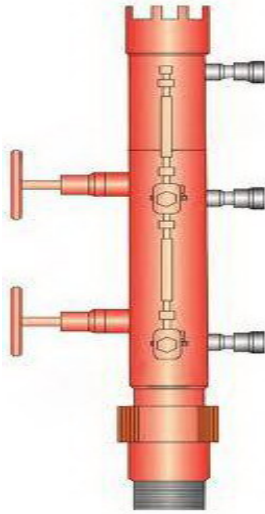

**Technical Specifications of Double-plug Cementing Head**

|  |                  |                  |                  |         |         |         |
|--|------------------|------------------|------------------|---------|---------|---------|
| Specification (in)   | 13-3/8           | 10-3/4           | 9-5/8            | 7-5/8   | 7       | 5-1/2   |
| Overall Length (mm)  | 2,770<br>(2,290) | 2,723<br>(2,283) | 2,606<br>(2,165) | (2,257) | (2,177) | (2,045) |
| Rated pressure (MPa)   | 35               | 50               |                  |         |         |         |
| Manifold Connection  | 2" Union         |                  |                  |         |         |         |
| I.D. of Plug Container (mm)  | 320              | 250              | 225              | 176     | 160     | 125     |
| <b>Note:</b> The overall lengths shown in brackets are for drill pipe cementing heads without lift joints. |                  |                  |                  |         |         |         |

## Drill Pipe Cementing Head

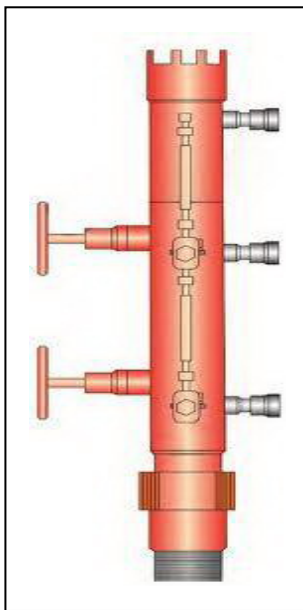

**Technical Specifications of Drill Pipe Cementing Head**

|  |          |                  |                  |       |
|--|----------|------------------|------------------|-------|
| Specification (in)   | 5-1/2    | 5                | 3-1/2            | 2-7/8 |
| Overall Length (mm)  | 1,937    | 1,890<br>(1,344) | 1,654<br>(1,090) | 910   |
| Manifold Connection  | 2" Union |                  |                  |       |
| Length of Plug Container (mm)  | 405      |                  | 340              | 294   |
| I.D. of Plug Container (mm)  | 118      | 100              | 72               | 52    |
| <b>Note:</b> The overall lengths shown in brackets are for drill pipe cementing heads without lift joints. |          |                  |                  |       |

|          |  |
|----------|--|
| Address: | No.7, Aucma Street, Laishan District, Yantai, Shandong, P.R.China 264003 |
| Tel:     | +86-535-6723520 6723201  |
| Fax:     | +86-535-6723171 6723272  |
| E-mail:  | petroleum@jereh.com; cnjereh@gmail.com                                   |
| Website: | Http://www.jereh-oilfield.com  |